

# P6000

## Remote Mount Miniature Pressure Sensor

### Description

The P6000 series pressure sensors incorporate a silicon, piezo resistive sensing element in a compact package. Using a 5VDC input, the sensors provide a 0.5 to 4.5VDC output, proportional to pressure. Internal temperature compensation provides an accurate, easy to use device.

The innovative remote mounting capability and customization features allow system designers to decouple their pressure sensing from PCB's.



### Features

- Rugged Miniature Package
- Amplified, Temperature Compensated Linear Output
- Remote Mounting Option EMI/RFI & ESD Protected
- Custom Packaging and Pressure Ranges

### Applications

#### Industrial

- Oxygen Concentrators
- Respirators
- Sleep Apnea

#### Transportation

- Instrumentation
- Pneumatic Controls
- Robotics

## MAIN FEATURES

<b>Pressure Ranges</b>	0 to 2.5 up to 0 – 100 PSI and 0 to 200 mBar up to 0 to 7 Bar
<b>Electrical Connection</b>	Hirose electrical connector 30 AWG, 12" lead wires
<b>Pressure Connection</b>	Barb for 3/16 ID tubing
<b>Housing Material</b>	Polyamide 66, 30% glass fiber reinforced
<b>Output Signal</b>	0.5 - 4.5 VDC



## Pressure Ranges

<b>From 0 to ...</b>	PSI	2.5	5	15	30	50	75	100
<b>Proof Pressure</b>	PSI	5	10	30	60	100	150	200
<b>Burst Pressure</b>	PSI	7.5	15	45	90	150	225	300

<b>From 0 to ...</b>	Bar	200 mBar	500 mBar	1	2	3.5	5	7
<b>Proof Pressure</b>	Bar	400 mBar	1	2	4	7	10	14
<b>Burst Pressure</b>	Bar	600 mBar	1.5	3	6	10.5	15	21

## Physical

<b>Operating Life Cycle</b>	min. 10 million full pressure cycles over the full range
<b>Vibration Resistance</b>	10 G's from 55 to 2000 Hz
<b>Shock Resistance</b>	50 G's ½ sine wave
<b>Drop Test</b>	1m onto concrete surface
<b>Weight</b>	≤ 1.3 grams (without mating connector)
<b>Operating Temperature</b>	0°C to + 85 °C
<b>Storage Temperature</b>	-30°C to + 100°C
<b>Media</b>	Dry or wet (non freezing) media compatible with silicon, FR4, PA66 silicone adhesive

## Performance

<b>Total Error Band<sup>2</sup></b>	±2% of span above 2.5 PSI or 200 mBar ±3% of span up to 2.5 PSI or 200 mBar
-------------------------------------	---

2. Including accuracy, calibration, temperature, non-linearity, hysteresis, non-repeatability, error

## Electrical


<b>Output Signal</b>	0.5...4.5 VDC ratiometric
<b>Operating Supply Signal</b>	5 VDC ± 5%
<b>Power Consumption</b>	≤ 25 mW
<b>Overvoltage Protection</b>	16 VDC
<b>Short-circuit Proofness</b>	Yes
<b>Insulation Voltage</b>	500 VDC
<b>Reverse Polarity Protection</b>	Yes <sup>3</sup>
<b>Output Load</b>	≥ 5 kΩ
<b>Response Time</b>	≤ 10 ms max. to 63% of full scale pressure with step change on input

\*3 for min. 10 seconds on assigned pins



# DIMENSIONS

Dimensions in mm [Inch]

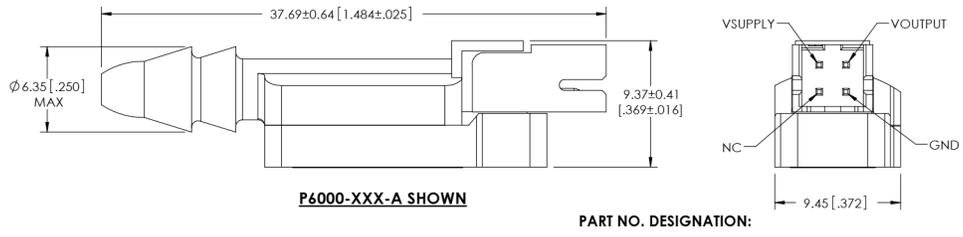



## ORDERING OPTIONS

Example: P6000-30G-A

P6000 Pressure Sensor, 0 - 30 PSI, Gage, Pin Header with no Mating Connector.

**P6000 - 30 G - A**

**Family**  
P6000

**Pressure Ranges**  
 2.5: 0 - 2.5 PSIG\*  
 5: 0 - 5 PSIG\*  
 15: 0 - 15 PSIG or PSIA  
 30: 0 - 30 PSIG or PSIA  
 50: 0 - 50 PSIG or PSIA  
 75: 0 - 75 PSIG or PSIA  
 100: 0 - 100 PSIG or PSIA  
 0.2B: 0 - 200 mBarG\*  
 0.5B: 0 - 500 mBarG\*  
 1B: 0 - 1 BarG or BarA  
 2B: 0 - 2 BarG or BarA  
 3.5B: 0 - 3.5 BarG or BarA

**Reference**  
 A: Absolute  
 G: Gage

**Electrical Termination**  
 A: Hirose Electrical Connector  
 B: Hirose electrical connection with matting connector 12" lead wires



## AGENCY APPROVALS & CERTIFICATIONS



2002/95/EC RoHS Directive



Pressure equipment directive 89 /336 /EEC, IEC/EN 61326-1: 2006, IEC/EN 61000-4-2: 2001, IEC/EN 61000-4-3: 2006, IEC/EN 61000-4-8: 2001.

Revised 2/7/18

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

### CONTACT US

#### Americas

+1 (800) 350 2727  
sensors@sensata.com  
switches@sensata.com

#### Europe, Middle East & Africa

+359 (2) 809 1826  
pressure-info.eu@sensata.com

#### Asia Pacific

sales.isasia@list.sensata.com  
China +86 (21) 2306 1500  
Japan +81 (45) 277 7117  
Korea +82 (31) 601 2004  
India +91 (80) 67920890  
Rest of Asia +886 (2) 27602006  
ext 2808