

# Proximity Magnetic Sensors Level Magnetic Sensors ILMM Series

CARLO GAVAZZI



- Cylindrical AISI 304 or 316 stainless steel housing
- NO or NC output functions
- Reversible output function by float overturning
- XLPE cable output connection
- High temperature versions available
- Suited for use in corrosive environments

## Product Description

The stainless steel models can be used also in corrosive environments. The micro level switches find their ideal application in food, chemical and oil industries.

The ILMM5S1 model is also available in S2 version with 1/8" gas thread.

## Ordering Key

**ILMM 5 S2 AT**

Type \_\_\_\_\_  
 Reed contact type \_\_\_\_\_  
 Special version \_\_\_\_\_  
 Special application \_\_\_\_\_

## Type Selection

Float diameter	Connection	Output function	Reference
Ø 28	XLPE cable L= 0.3m	NO, NC*	<b>ILMM 5</b>
Ø 28	XLPE cable L= 0.3m	NO, NC*	<b>ILMM 5 90</b>
Ø 28	TEFLON cable L= 1.1m	NO, NC*	<b>ILMM 5 AT S1</b>
Ø 28	TEFLON cable L= 0.3m	NC	<b>ILMM 5 S2 AT</b>
Ø 28	XLPE cable L= 0.3m	NC	<b>ILMM 5 S2</b>
Ø 28	XLPE cable L= 0.3m	NO	<b>ILMM 5 S1</b>

Diameters are specified in millimeters (mm)

\*Reversible output function by float overturning


## Output Specifications

<b>Output</b> ILMM5, ILMM590, ILMM5ATS1 ILMM5S2AT, ILMM5S2 ILMM5S1	NO, NC NC NO
<b>Contact ratings</b> Max Switching Voltage Max Switching Current Max Switching Power	240 VAC, 220 VDC 0.5 A 50 VA

## General Specifications

<b>Operating temperature</b> ILMM5, ILMM590 ILMM5ATS1, ILMM5S2AT ILMM5S1, ILMM5S2	-10 to +120 °C -10 to +200 °C -20 to +120 °C
<b>Degree of protection</b>	IP 68 (cable output IP67)
<b>Float</b> Diameter Material ILMM5, ILMM590, ILMM5ATS1 ILMM5S2AT, ILMM5S1, ILMM5S2	Ø 28 mm AISI 304 stainless steel AISI 316 stainless steel
<b>Min liquid specific gravity</b>	0.75 kg/dm <sup>3</sup>
<b>Max pressure</b>	10 kg/cm <sup>2</sup>
<b>Special applications</b> ILMM5ATS1, ILMM5S2AT	High temperature versions
<b>CE-marking</b>	Yes

## Wiring Diagrams

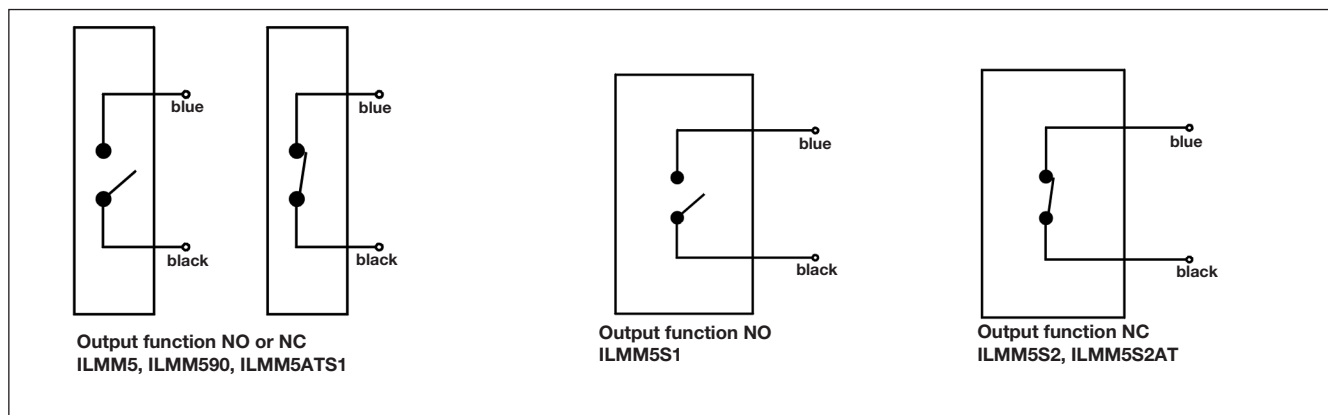

## Dimensions

